


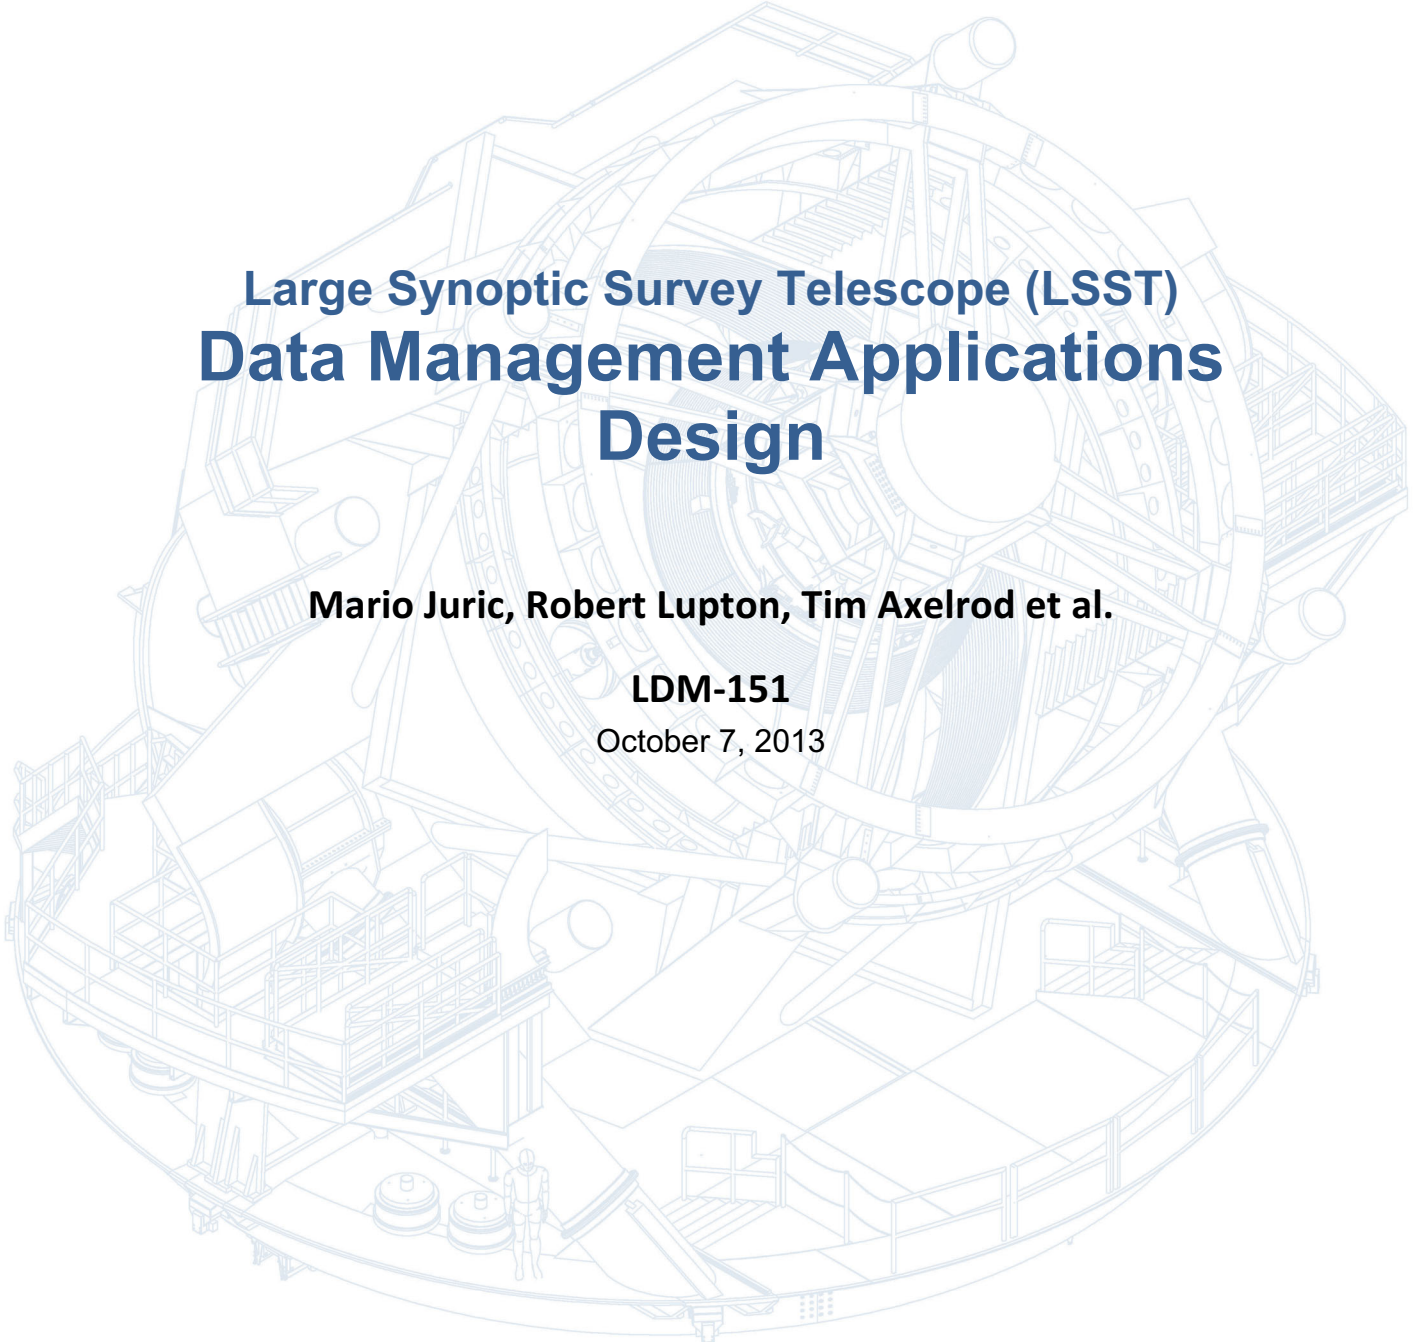

LARGE SYNOPTIC SURVEY TELESCOPE

A detailed white line-art cutaway diagram of the LSST dome, showing the internal structure, including the telescope's primary mirror, secondary mirror, and various support structures and platforms. A small human figure is shown at the bottom for scale.


Large Synoptic Survey Telescope (LSST) Data Management Applications Design

Mario Juric, Robert Lupton, Tim Axelrod et al.

LDM-151

October 7, 2013





Change Record

Version	Date	Description	Owner name
1	3/26/2009	Initial version as Document-7396	Tim Axelrod, et. al
1.2	3/27/2009	Minor edits	Tim Axelrod
1.3	4/17/2009	General edits and updates	Tim Axelrod
1.4	5/8/2009	Explicit reference to multifit added to Section 6.1	Tim Axelrod
1.5	2/11/2010	General edits and updates; generated from SysML model	Jeff Kantor
2	8/4/2011	Elevated to LDM handle; general updates and edits	Tim Axelrod
3	10/7/2013	Updates for consistency with FDR baseline	Mario Juric
WIP	2015	Work in progress as part of 2015 replanning exercise	Lim, Bosch, Economou, Krughoff, Swinbank, et al.

Large Synoptic Survey Telescope Data Management Applications Design

Mario Jurić*, R.H. Lupton, T. Axelrod, J.F. Bosch, P.A. Price,
G.P. Dubois-Felsmann, Ž. Ivezić, A.C. Becker, J. Becla,
A.J. Connolly, J. Kantor, K-T Lim, D. Shaw,
for the LSST Data Management

Sunday 12th June, 2016, 22:01hrs

*Please direct comments to <mjuric@lsst.org>.

Abstract

The LSST Science Requirements Document (the LSST [SRD](#)) specifies a set of data product guidelines, designed to support science goals envisioned to be enabled by the LSST observing program. Following these guidelines, the details of these data products have been described in the LSST Data Products Definition Document ([DPDD](#)), and captured in a formal flow-down from the [SRD](#) via the LSST System Requirements ([LSR](#)), Observatory System Specifications ([OSS](#)), to the Data Management System Requirements ([DMSR](#)). The LSST Data Management subsystem's responsibilities include the design, implementation, deployment and execution of software pipelines necessary to generate these data products. This document, in conjunction with the UML Use Case model ([LDM-134](#)), describes the design of the scientific aspects of those pipelines.

Contents

1	Preface	9
2	Introduction	10
2.1	LSST Data Management System	10
2.2	Data Products	13
2.3	Data Units	14
2.4	Science Pipelines Organization	15
3	Level 1 Pipelines	17
3.1	Single Frame Processing Pipeline (WBS 02C.03.01)	17
3.1.1	Key Requirements	17
3.1.2	Baseline Design	18
3.1.2.1	Instrumental Signature Removal:	18
3.1.2.2	PSF determination and background determination:	19
3.1.2.3	Source measurement:	20
3.1.2.4	Photometric and Astrometric calibration:	20
3.1.3	Prototype Implementation	21
3.2	Alert Detection (WBS 02C.03.04)	23
3.2.1	Key Requirements	23
3.2.2	Baseline Design	23
3.2.2.1	Template Generation	23
3.2.2.2	Image differencing	23
3.2.2.3	Real-Bogus classification	24
3.2.2.4	Ephemeris Calculation	25
3.2.2.5	Source Association	25
3.2.3	Prototype Implementation	25
3.3	Alert Generation Pipeline (WBS 02C.03.03)	26
3.3.1	Key Requirements	26
3.3.2	Baseline Design	26
3.3.2.1	Alert generation	26
3.3.2.2	Alert Distribution	26
3.3.2.3	Forced Photometry on all DIAObjects	27
3.3.3	Prototype Implementation	27
3.4	Precovery Photometry Pipeline	28
3.4.1	Key Requirements	28

3.4.1.1	Precovery of new DIAObjects	28
3.5	Moving Object Pipeline (WBS 02C.03.06)	29
3.5.1	Key Requirements	29
3.5.2	Baseline Design	29
3.5.2.1	Generate Tracklets	29
3.5.2.2	Attribution and precovery	30
3.5.2.3	Fit Orbits	30
3.5.2.4	Association and Precovery: New SSOBJECTS	30
3.5.2.5	Merge Orbits	31
3.5.3	Prototype Implementation	31
4	Calibration Products Production	32
4.1	Calibration Products Pipeline (WBS 02C.04.02)	32
4.1.1	Key Requirements	32
4.1.2	Baseline Design	32
4.1.2.1	Instrumental sensitivity	32
4.1.2.2	Atmospheric transmissivity	33
4.1.2.3	Detector effects	33
4.1.2.4	Ghost catalog	35
4.1.3	Constituent Use Cases and Diagrams	35
4.1.4	Prototype Implementation	36
4.2	Photometric Calibration Pipeline (WBS 02C.03.07)	37
4.2.1	Key Requirements	37
4.2.2	Baseline Design	37
4.2.3	Constituent Use Cases and Diagrams	37
4.2.4	Prototype Implementation	37
4.3	Astrometric Calibration Pipeline (WBS 02C.03.08)	38
4.3.1	Key Requirements	38
4.3.2	Baseline Design	38
4.3.3	Constituent Use Cases and Diagrams	38
4.3.4	Prototype Implementation	38
5	Data Release Production	39
5.1	Exposure Characterization and Calibration	42
5.1.1	BootstrapImChar	42
5.1.2	BootstrapJointCal	42
5.1.3	RefineImChar	42
5.1.4	RefineJointCal	42

5.1.5	FinalImChar	42
5.1.6	FinalJointCal	42
5.2	Coaddition and Difference Imaging	42
5.2.1	WarpAndPsfMatch	43
5.2.2	BackgroundMatchAndReject	43
5.2.3	WarpAndPsfCorrelate	43
5.2.4	CoaddTemplate	43
5.2.5	DiffIm	43
5.2.6	DecorrelateCoadds	43
5.3	Object Definition	43
5.3.1	DeepDetect	43
5.3.2	DeepAssociate	43
5.3.3	DeepDeblend	43
5.3.4	ResolvePatchOverlaps	43
5.3.5	ResolveTractOverlaps	43
5.4	Object Characterization	43
5.4.1	MeasureCoadds	44
5.4.2	MultiFit	44
5.4.3	ForcedPhotometry	44
5.5	Postprocessing	44
5.5.1	MOPS	44
5.5.2	MakeSelectionMaps	44
5.5.3	Classification	44
5.5.4	GatherContributed	44
6	Services for Data Quality Analysis (SDQA)	45
6.1	Key Requirements	45
6.2	Key Tasks for Each Level of QA	46
6.2.1	QA0	46
6.2.2	QA1	47
6.2.3	QA2	49
6.2.4	QA3	49
6.2.5	Prototype Implementation of PipeQA	49
7	Science User Interface and Toolkit	51
7.1	Science Pipeline Toolkit (WBS 02C.01.02.03)	51
7.1.1	Key Requirements	51
7.1.2	Baseline Design	51

7.1.3	Constituent Use Cases and Diagrams	51
7.1.4	Prototype Implementation	51
8	Algorithmic Components	52
8.1	Instrument Signature Removal	52
8.1.1	AP: just skip some steps?	52
8.1.2	DRP: do all the steps	52
8.2	Artifact Detection	53
8.2.1	Single-Exposure Morphology	53
8.2.2	Single-Exposure Aggregation	53
8.2.3	Snap Subtraction	53
8.2.4	Warped Image Comparison	53
8.3	Artifact Masking/Interpolation	53
8.4	Source Detection	54
8.5	Deblending	54
8.5.1	Single Visit Deblending	54
8.5.2	Multi-Coadd Deblending	54
8.6	Measurement	54
8.6.1	Variants	56
8.6.1.1	Single Visit Measurement:	56
8.6.1.2	Multi-Coadd Measurement:	56
8.6.1.3	Difference Image Measurement:	56
8.6.1.4	Multi-Epoch Measurement:	57
8.6.1.5	Forced Measurement:	57
8.6.2	Algorithms	58
8.6.2.1	Centroids	58
8.6.2.2	Second-Moment Shapes	58
8.6.2.3	Aperture Photometry	58
8.6.2.4	Static Point Source Models	59
8.6.2.5	Kron Photometry	59
8.6.2.6	Petrosian Photometry	59
8.6.2.7	Galaxy Models	59
8.6.2.8	Moving Point Source Models	59
8.6.2.9	Trailed Point Source Models	60
8.6.2.10	Dipole Models	60
8.6.2.11	Spuriousness	60
8.6.3	Blended Measurement	60
8.6.3.1	Deblend Template Projection	60

8.6.3.2	Neighbor Noise Replacement	60
8.6.3.3	Simultaneous Fitting	60
8.6.3.4	Hybrid Models	60
8.7	Background Estimation	60
8.8	Build Background Reference	61
8.9	PSF Estimation	61
8.9.1	Single CCD PSF Estimation	61
8.9.2	Full Visit PSF Estimation	61
8.10	Model Spatial Variation of PSF	62
8.10.1	Within a CCD	62
8.10.2	Over a focal plane – Do we need this?	62
8.11	Aperture Correction	62
8.12	Astrometric Fitting	62
8.12.1	Single CCD	62
8.12.2	Single Visit	62
8.12.3	Joint Multi-Visit	62
8.13	Photometric Fitting	63
8.13.1	Single CCD (for AP)	63
8.13.2	Single Visit	63
8.13.3	Joint Multi-Visit	63
8.14	Retrieve Diffim Template for a Visit	63
8.15	PSF Matching	63
8.15.1	Image Subtraction	64
8.15.2	PSF Homogenization for Coaddition	64
8.16	Image Warping	64
8.16.1	Oversampled Images	64
8.16.2	Undersampled Images	65
8.16.3	Irregularly-Sampled Images	65
8.17	Image Coaddition	65
8.18	DCR-Corrected Template Generation	65
8.19	Image Decorrelation	66
8.19.1	Difference Image Decorrelation	66
8.19.2	Coadd Decorrelation	66
8.20	Star/Galaxy Classification	66
8.20.1	Single Visit S/G, Pre-PSF	66
8.20.2	Single Visit S/G, Post-PSF	66
8.20.3	Multi-Source S/G	66
8.20.4	Object Classification	67

8.21	Variability Characterization	67
8.21.1	Characterization of periodic variability	67
8.21.2	Characterization of aperiodic variability	68
8.22	Proper Motion and Parallax from DIASources	70
8.23	Association and Matching	70
8.23.1	Single CCD to Reference Catalog, Semi-Blind	70
8.23.2	Single Visit to Reference Catalog, Semi-Blind	71
8.23.3	Multiple Visits to Reference Catalog	71
8.23.4	DIAObject Generation	71
8.23.5	Object Generation	71
8.23.6	Cross-Patch Merging	71
8.23.7	Cross-Tract Merging	72
8.24	Ephemeris Calculation	72
8.25	Make Tracklets	72
8.26	Attribution and precovery	72
8.27	Orbit Fitting	73
9	Software Primitives	74
9.1	Images	74
9.1.1	Exposure	74
9.2	Tables	74
9.2.1	Source	74
9.2.2	Reference	74
9.2.3	Object	74
9.3	Footprints	74
9.4	Convolution Kernels	74
9.5	Basic Statistics	74
9.6	Point-Spread Functions	74
9.7	Coordinate Transformations	74
10	Glossary	75

1 Preface

The purpose of this document is to describe the design of pipelines belonging to the Applications Layer of the Large Synoptic Survey Telescope (LSST) Data Management system. These include most of the core astronomical data processing software that LSST employs.

The intended audience of this document are LSST software architects and developers. It presents the baseline architecture and algorithmic selections for core DM pipelines. The document assumes the reader/developer has the required knowledge of astronomical image processing algorithms and solid understanding of the state of the art of the field, understanding of the LSST Project goals and concepts, and has read the LSST Science Requirements (SRD) as well as the LSST Data Products Definition Document (DPDD).

This document should be read in conjunction with the LSST DM Applications Use Case Model (LDM-134). They are intended to be complementary, with the Use Case model capturing the detailed (inter)connections between individual pipeline components, and this document capturing the overall goals, pipeline architecture, and algorithmic choices.

Though under strict change control¹, this is a *living document*. Firstly, as a consequence of the “rolling wave” LSST software development model, the designs presented in this document will be refined and made more detailed as particular pipeline functionality is about to be implemented. Secondly, the LSST will undergo a period of construction and commissioning lasting no less than seven years, followed by a decade of survey operations. To ensure their continued scientific adequacy, the overall designs and plans for LSST data processing pipelines will be periodically reviewed and updated.

¹LSST Docushare handle for this document is LDM-151.

2 Introduction

2.1 LSST Data Management System

To carry out this mission the Data Management System (DMS) performs the following major functions:

- Processes the incoming stream of images generated by the camera system during observing to produce transient alerts and to archive the raw images.
- Roughly once per year, creates and archives a Data Release (“DR”), which is a static self-consistent collection of data products generated from all survey data taken from the date of survey initiation to the cutoff date for the Data Release. The data products (described in detail in the [DPDD](#)), include measurements of the properties (shapes, positions, fluxes, motions, etc.) of all detected objects, including those below the single visit sensitivity limit, astrometric and photometric calibration of the full survey object catalog, and limited classification of objects based on both their static properties and time-dependent behavior. Deep coadded images of the full survey area are produced as well.
- Periodically creates new calibration data products, such as bias frames and flat fields, that will be used by the other processing functions, as necessary to enable the creation of the data products above.
- Makes all LSST data available through interfaces that utilize, to the maximum possible extent, community-based standards such as those being developed by the Virtual Observatory (“VO”), and facilitates user data analysis and the production of user-defined data products at Data Access Centers (“DAC”) and at external sites.

The overall architecture of the DMS is discussed in more detail in the Data Management System Design ([DMSD](#)) document. The overall architecture of the DMS is shown in Figure 1.

This document discusses the role of the Applications layer in the first three functions listed above (the functions involving *science pipelines*). The fourth is discussed separately in the SUI Conceptual Design Document ([SUID](#)).

02C.01.02 SDQA System		
02C.05 Science User Interface and Analysis Tools	02C.03, 02C.04 Alert, Calibration, Data Release Productions	
02C.06.01 Science Data Archive (Images, Alerts, Catalogs)	Algorithmic Components	
02C.03.05, 02C.04.01 Shared Software Primitives		
02C.06.02 Data Access Services		
02C.07.01, 02C.06.03 Processing Middleware		
02C.07.02 Infrastructure Services (System Administration, Operations, Security)		
02C.07.04.01 Archive Site	02C.07.04.02 Base Site	02C.08.03 Long-Haul Communications
Physical Plant (included in above)		

Data Management System Design LDM-148

Application Layer (LDM-151)

- Scientific Layer
- Pipelines constructed from reusable Algorithmic Components
- Data Products represented by Shared Software Primitives
- Object-oriented, python, C++ Custom Software

Middleware Layer (LDM-152)

- Portability to clusters, grid, other
- Provide standard services so applications behave consistently (e.g. provenance)
- Preserve performance (<1% overhead)
- Custom Software on top of Open Source, Off-the-shelf Software

Infrastructure Layer (LDM-129)

- Distributed Platform
- Different sites specialized for real-time alerting vs peta-scale data access
- Off-the-shelf, Commercial Hardware & Software, Custom Integration

Figure 1: Architecture of the Data Management System

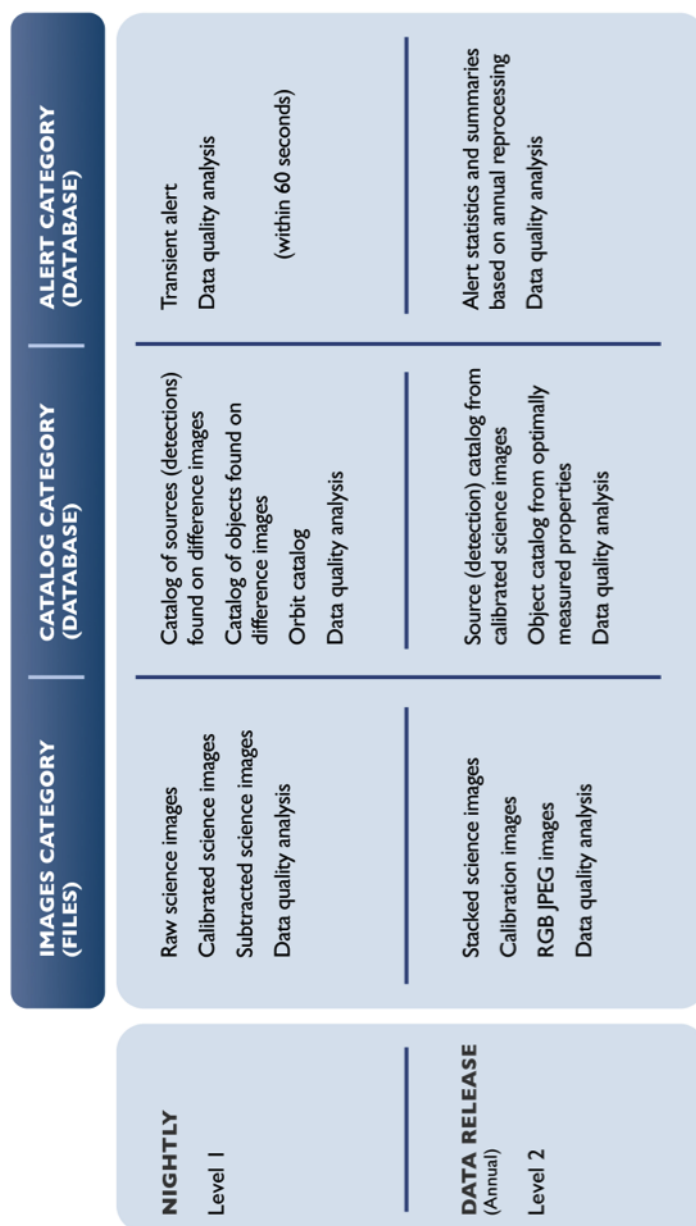


Figure 2: Organization of LSST Data Products

2.2 Data Products

The LSST data products are organized into three groups, based on their intended use and/or origin. The full description is provided in the Data Products Definition Document (DPDD); we summarize the key properties here to provide the necessary context for the discussion to follow.

- **Level 1** products are intended to support timely detection and follow-up of time-domain events (variable and transient sources). They are generated by near-real-time processing the stream of data from the camera system during normal observing. Level 1 products are therefore continuously generated and / or updated every observing night. This process is of necessity highly automated, and must proceed with absolutely minimal human interaction. In addition to science data products, a number of related Level 1 “SDQA”² data products are generated to assess quality and to provide feedback to the Observatory Control System (OCS).
- **Level 2** products are generated as part of a Data Release, generally performed yearly, with an additional data release for the first 6 months of survey data. Level 2 includes data products for which extensive computation is required, often because they combine information from many exposures. Although the steps that generate Level 2 products will be automated, significant human interaction may be required at key points to ensure the quality of the data.
- **Level 3** products are generated on any computing resources anywhere and then stored in an LSST Data Access Center. Often, but not necessarily, they will be generated by users of LSST using LSST software and/or hardware. LSST DM is required to facilitate the creation of Level 3 data products by providing suitable APIs, software components, and computing infrastructure, but will not by itself create any Level 3 data products. Once created, Level 3 data products may be associated with Level 1 and Level 2 data products through database federation. Where appropriate, the LSST Project, with the agreement of the Level 3 creators, may incorporate user-contributed Level 3 data product pipelines into the DMS production flow, thereby promoting them to Level 1 or 2.

²Science Data Quality Analysis

The organization of LSST Data Products is shown in Figure 2.

Level 1 and Level 2 data products that have passed quality control tests will be accessible to the public without restriction. Additionally, the source code used to generate them will be made available, and LSST will provide support for builds on selected platforms.

The pipelines used to produce these public data products will also produce many intermediate data products that may not be made publically available (generally because they are fully superseded in quality by a public data product). Intermediate products may be important for QA, however, and their specification is an important part of describing the pipelines themselves.

2.3 Data Units

In order to describe the components of our processing pipelines, we first need standard nomenclature for the units of data the pipeline will process.

The smallest data units are those corresponding to individual astrophysical entities. In keeping with LSST conventions, we use “object” to refer to the astrophysical entity itself (which typically implies aggregation of some sort over all exposures), and “source” to refer to the realization of an object on a particular exposure. In the case of blending, of course, these are just our best attempts to define distinct astrophysical objects, and hence it is also useful to define terms that represent this process. We use “family” to refer to group of blended objects (or, more rarely, sources), and “child” to refer to a particular deblended object within a family. A “parent” is also created for each family, representing the alternate hypothesis that the blend is actually a single object. Blends may be hierarchical; a child at one level may be a parent at the level below.

LSST observations are taken as a pair of 15-second “snaps”; together these constitute a “visit”. Because snaps are typically combined early in the processing (and some special programs and survey modes may take only a single snap), visit is much more frequently used as a unit for processing and data products. The image data for to a visit is a set of 189 “CCD” or “sensor” images. CCD-level data from the camera is further data divided across the 16 amplifiers within a CCD, but these are also combined at an early stage, and the 3×3 CCD “rafts” that play an important role in the hardware design are relatively unimportant for the pipeline. This leaves visit and CCD the main identifiers of most exposure-level data products and pipelines.

Our convention for defining regions on the sky is deliberately vague; we

hope to build a codebase capable of working with virtually any pixelization or projection scheme (though different schemes may have different performance or storage implications). Our approach involves two region concepts: “tracts” and “patches”. A tract is a large region with a single Cartesian coordinate system; we assume it is larger than the LSST field of view, but its maximum size is essentially set by the point at which distortion in the projection becomes significant enough to affect the processing (by e.g. breaking the assumption that the PSF is well-sampled on the pixel grid). Tracts are divided into patches, all of which share the tract coordinate system. Most image processing is performed at the patch level, and hence patch sizes are chosen largely to ensure that patch-level data products and processing fit in memory. Both tracts and patches are defined such that each region overlaps with its neighbors, and these overlap regions must be large enough that any individual astronomical object is wholly contained in at least one tract and patch. In a patch overlap region, we expect pixel values to be numerically equivalent (i.e. equal up to floating point round-off errors) on both sides; in tract overlaps, this is impossible, but we expect the results to be scientifically consistent. Selecting larger tracts and patches thus reduces the overall fraction of the area that falls in overlap regions and must be processed multiple times, while increasing the computational load for processing individual tracts and patches.

2.4 Science Pipelines Organization

As shown in Figure 1, the Applications Layer is itself split into three levels. In sections 3, 4, and 5, we describe the Alert Production, Calibration Products Production, and Data Release Production (respectively), breaking them down into *pipelines*. In this document, a pipeline is a high-level combination of algorithms that is intrinsically tied to its role in the production in which it is run. For instance, while both Alert Production and Data Release Production will include a pipeline for single-visit processing, these two pipelines are *distinct*, because the details of their design depend very much on the context in which they are run. Section 6 describes the Science Data Quality Analysis System, a collection of pipelines and mini-productions designed to assess and continuously validate the quality of both the data and the processing system. The SDQA System is not a single production; its components are either directly integrated into other productions or part of a set of multiple mini-productions run on different cadences.

Pipelines are largely composed of Algorithmic Components: mid-level algorithmic code that we expect to reuse (possibly with different configuration) across different productions. These components constitute the bulk of the new code and algorithms to be developed for Alert Production and Data Release Production, and are discussed in section 8. Most algorithmic components are applicable to any sort of astronomical imaging data, but some will be customized for LSST.

The lowest level in the Applications Layer is made up of our shared software primitives: libraries that provide important data structures and low-level algorithms, such as images, tables, coordinate transformations, and nonlinear optimizers. Much (but not all) of this content is astronomy-related, but essentially none of it is specific to LSST, and hence we can and will make use of third-party libraries whenever possible. These primitives also play an important role in connecting the Science User Interface Toolkit and Level 3 processing environment with Level 1 and Level 2 data products, as they constitute the programmatic representation of those data products. Shared software primitives are discussed in section 9.

3 Level 1 Pipelines

3.1 Single Frame Processing Pipeline (WBS 02C.03.01)

3.1.1 Key Requirements

Single Frame Processing (SFM) Pipeline is responsible for reducing raw image data to *calibrated exposures*, and detection and measurement of **Sources** (using the components functionally a part of the Object Characterization Pipeline).

SFM pipeline functions include:

- Assembly of per-amplifier images to an image of the entire CCD;
- Instrumental Signature Removal;
- Cosmic ray rejection and snap combining;
- Per-CCD determination of zeropoint and aperture corrections;
- Per-CCD PSF determination;
- Per-CCD WCS determination and astrometric registration of images;
- Per-CCD sky background determination;
- Source detection and measurement

Calibrated exposure produced by the SFM pipeline must possess all information necessary for measurement of source properties by single-epoch Object Characterization algorithms.

It shall be possible to run this pipeline in two modes: a “fast” mode needed in nightly operations for Level 1 data reductions where no source characterization is done beyond what’s required for zero-point, PSF, sky, and WCS determination (image reduction); and a “full” mode that will be run for Level 2 data reductions.

3.1.2 Baseline Design

Single Frame Processing pipeline will be implemented as a flexible framework where different data can be easily treated differently, and new processing steps can be added without modifying the stack code.

It will consist of three primary components:

- A library of useful methods that wrap a small number of atomic operations (e.g., `interpolateFromMask`, `overscanCorrection`, `biasCorrection`, etc.)
- A set of classes (`Tasks`) that perform higher level jobs (e.g., `AssembleCcdTask`, or `FringeTask`), and a top level class to apply corrections to the input data in the proper order. This top level class can be overridden in the instrument specific `obs_*` packages, making the core SFM pipeline camera agnostic.
- A top-level Task to run the SFM pipeline.

In the paragraphs to follow, we describe the adopted baseline for key SFM algorithms. If not discussed explicitly, the algorithmic baseline for all other functionality is assumed to be the same as that used by SDSS *Photo* pipeline [18].

Output information for OCS telemetry: ACTION clarify OCS interactions

3.1.2.1 Instrumental Signature Removal: Clarify interaction with butler

Input Data

- Camera corrected (crosstalk, overscan, linearity) images
- Sensor defect lists
- Metadata including electronic parameters (saturation limits, readnoise, electronic footprint)

Output Data

- Calexp images

Ancillary Products?

- Source detection and measurements
- ICExp background subtracted images
- Post ISR exposure

Actions in case of failure?

Actions in case camera data are not available due to network outage longer than buffer of data at summit **Alternative procedures?**

Subtasks:

- Mask defects and saturation
- Assembly
- Full frame corrections: Dark, Flats (includes fringing)
- Pixel level corrections: Brighter fatter, static pixel size effects
- **QUESTION is this run prior to pixel level corrections** Interpolation of defects and saturation
- CR rejection
- Generate snap difference
- Snap combination

3.1.2.2 PSF determination and background determination:

Input Data?

Output Data?

Ancillary Products?

Actions in case of failure?

Alternative procedures?

Subtasks:

Iterate till convergence (convergence criteria TBD)

- Background estimation
- Source detection
- Selection of PSF candidate stars
- PSF determination

3.1.2.3 Source measurement:**Input Data?****Output Data?****Anscillary Products?****Actions in case of failure?****Alternative procedures?****Subtasks:**

- Source measurement - Single Visit Measurement
- Aperture correction

3.1.2.4 Photometric and Astrometric calibration:**Input Data?**DRP's internal reference catalog **Output Data?**OCS PSF, WCS, metadata (TBD) **Anscillary Products?****Actions in case of failure?****Alternative procedures?****Subtasks:**

- Source association
- CCD level photometric solution
- Visit level photometric solution
- Remove known astrometric distortions
- Fit remaining residual
- Single visit composed astrometric solution

- Output information for OCS telemetry: WCS ACTION clarify OCS interactions

OUTPUT: Calibrated Exposure and Calibrated Catalog

3.1.3 Prototype Implementation

The prototype codes are available in the following repositories: https://github.com/lsst/ip_isr, https://github.com/lsst/meas_algorithms, https://github.com/lsst/meas_astrom, https://github.com/lsst-dm/legacy-meas_mosaic, https://github.com/lsst/pipe_tasks.

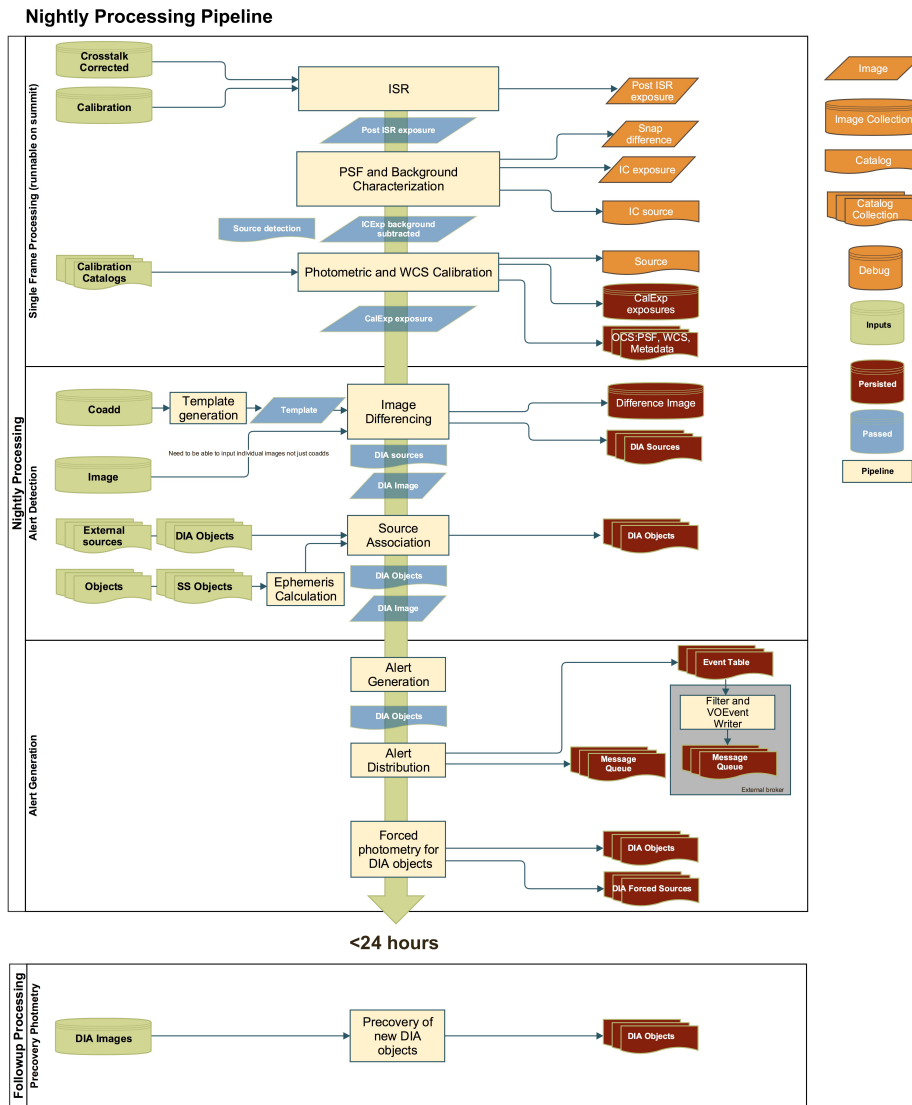


Figure 3: The nightly processing flowchart describing the flow of images and data through single frame processing, image differencing, alert generation and production

3.2 Alert Detection (WBS 02C.03.04)

3.2.1 Key Requirements

The alert detection pipeline shall difference a visit image against a deeper template, and detect and characterize sources in the difference image in the time required to achieve the 60 second design goal for Level 1 alert processing (current timing allocation: 24 seconds). The algorithms employed by the pipeline shall result in purity and completeness of the sample as required by the [DMSR](#) . Image differencing shall perform as well in crowded as in uncrowded fields.

3.2.2 Baseline Design

3.2.2.1 Template Generation

Input Data?

Coadded CalExps or Series of CalExp from which to interpolate a template.

Output Data?

Anscillary Products?

Actions in case of failure?

Alternative procedures?

Subtasks:

- Determine appropriate template to use
- Generate template for observation

3.2.2.2 Image differencing

Input Data?

Internal reference catalog for CalExp from DRP PSF for science image

Output Data?

Anscillary Products?

Actions in case of failure?

Alternative procedures?

Subtasks:

- match DRP sources and sources from SFP

- Determine relative astrometric solution
- Warp template and measurements to science image frame
- Correlate science image with science PSF (pre-convolution)
- Determine appropriate PSF matching sources
- Compute PSF matching kernel and spatial model using ZOGY approach
- Difference science and template images
- Apply correction for correlated noise
- Difference image source detection
- Difference image source measurement: dipole fit, trailed source measurement
- Measure flux on snap difference for all DIASources

3.2.2.3 Real-Bogus classification

Input Data?

Internal reference catalog for CalExp from DRP PSF for science image

Output Data?

Anscillary Products?

Actions in case of failure?

Alternative procedures?

Subtasks:

- Application of random forest or other classification algorithm
- Update DIASources with probabilistic classification
- Filter DIASource list based on classifier

3.2.2.4 Ephemeris Calculation

Input Data?

Output Data?

Anscillary Products?

Actions in case of failure?

Alternative procedures?

Subtasks:

- Calculate positions for all solar system objects that may overlap the current exposure.

3.2.2.5 Source Association

Input Data?

Output Data?

Anscillary Products?

Actions in case of failure?

Alternative procedures?

Subtasks:

- Match all DIASources to predicted Solar System object positions and DIAObject catalog positions
- Perform forced photometry of un-associated DIAObjects. (Maybe not if we force photometer all DIAObjects?). SSOjects will not be force photometered because the precision of the prediction will not be good enough. Force photometry for external DIAObjects?
- Update associated DIAObjects with aggregate quantities: e.g. parallax, proper motion, and variability metrics
- New spuriousness calculation?

3.2.3 Prototype Implementation

The prototype code is available at https://github.com/lstt/ip_diffim. The current prototype, while functional, will require a partial redesign to be transfered to construction to address performance and extensibility concerns.

3.3 Alert Generation Pipeline (WBS 02C.03.03)

3.3.1 Key Requirements

Alert Generation Pipeline shall take the newly discovered `DIASources` and all associated metadata as described in the [DPDD](#), and generate alert packets in `VOEvent` format. It will transmit these packets to VO Event Brokers, using standard IVOA protocols (eg., VOEvent Transport Protocol; VTP). End-users will primarily use these brokers to classify and filter events for subsets fitting their science goals.

To directly serve the end-users, the Alert Generation Pipeline shall provide a basic, limited capacity, alert filtering service. This service will run at the LSST U.S. Archive Center (at NCSA). It will let astronomers create simple filters that limit what alerts are ultimately forwarded to them. These *user defined filters* will be possible to specify using an SQL-like declarative language, or short snippets of (likely Python) code.

3.3.2 Baseline Design

3.3.2.1 Alert generation

Input Data?

Output Data?

Anscillary Products?

Actions in case of failure?

Alternative procedures?

Subtasks:

- Generate postage stamps for all `DIASources`: direct image and difference image
- Push alert records to alert database

3.3.2.2 Alert Distribution

Input Data?

Output Data?

Anscillary Products?

Actions in case of failure?

Alternative procedures?

Subtasks:

- Filter event records (for content as well as for events)
- Author VOEvent
- Push to messaging queue

3.3.2.3 Forced Photometry on all DIAObjects

Input Data?

Output Data?

Anscillary Products?

Actions in case of failure?

Alternative procedures?

Subtasks:

- Compute forced photometry on all DIAObjects in the field. This does not end up in the alerts.

3.3.3 Prototype Implementation

3.4 Precovery Photometry Pipeline

3.4.1 Key Requirements

Within 24 hrs.

3.4.1.1 Precovery of new DIAObjects

Input Data?

Output Data?

Anscillary Products?

Actions in case of failure?

Alternative procedures?

Subtasks:

- Force photometer in difference images for all new DIAObjects for the past 30 days.

3.5 Moving Object Pipeline (WBS 02C.03.06)

3.5.1 Key Requirements

The Moving Object Pipeline System (MOPS) has two responsibilities within LSST Data Management:

- First, it is responsible for generating and managing the Solar System³ data products. These are Solar System objects with associated Keplerian orbits, errors, and detected *DIASources*. Quantitatively, it shall be capable of detecting 95% of all Solar System objects that meet the findability criteria as defined in the *OSS*. The software components implementing this function are known as *DayMOPS*.
- The second responsibility of the MOPS is to predict future locations of moving objects in incoming images so that their sources may be associated with known objects; this will reduce the number of spurious transient detections and appropriately flag alerts to detections of known Solar System objects. The software components implementing this function are known as *NightMOPS*.

3.5.2 Baseline Design

3.5.2.1 Generate Tracklets

Output Data?

Anscillary Products?

Actions in case of failure?

Alternative procedures?

Subtasks:

- Make all tracklet pairs
- Merge multiple chained observation into single longer tracklets
- Purge any tracklets inconsistent with the merged tracklets

³Also sometimes referred to as ‘Moving Object’

3.5.2.2 Attribution and precovery

Output Data?

Anscillary Products?

Actions in case of failure?

Alternative procedures?

Subtasks:

- Predict locations of known Solar System objects
- Match tracklet observation to predicted ephemerides taking into account velocity
- Update SSObjects
- Possibly iterate

3.5.2.3 Fit Orbits

Output Data?

Anscillary Products?

Actions in case of failure?

Alternative procedures?

Subtasks:

- Merge unassociated tracklets into tracks.
- Fit orbits to all tracks.
- Purge unphysical tracks.
- Update SSObjects
- Possibly iterate

3.5.2.4 Association and Precovery: New SSObjects

Output Data?

Anscillary Products?

Actions in case of failure?

Alternative procedures?

Subtasks:

- Do association and precovery just for SSOBJECTS just found
- Update SSOBJECTS

3.5.2.5 Merge Orbits

Output Data?

Anscillary Products?

Actions in case of failure?

Alternative procedures?

Subtasks:

- Merge orbits with high probability of being the same orbit into a single SSOBJECT

3.5.3 Prototype Implementation

Prototype MOPS codes are available at https://github.com/lsst/mops_daymops and https://github.com/lsst/mops_nightmops. We expect it will be possible to transfer a significant fraction of the existing code into Construction. Current DayMOPS prototype already performs within the computational envelope envisioned for LSST Operations, though it does not yet reach the required completeness requirement.

4 Calibration Products Production

4.1 Calibration Products Pipeline (WBS 02C.04.02)

4.1.1 Key Requirements

The work performed in this WBS serves two complementary roles:

- It will enable the production of calibration data products as required by the Level 2 Photometric Calibration Plan ([LSE-180](#)) and other planning documents [20]⁴. This includes both characterization of the sensitivity of the LSST system (optics, filters and detector) and the transmissivity of the atmosphere.
- It will characterize of detector anomalies in such a way that they can be corrected either by the instrument signature removal routines in the Single Frame Processing Pipeline (WBS 02C.03.01) or, if appropriate, elsewhere in the system;
- It will manage and provide a catalog of optical ghosts and glints to other parts of the system upon demand.

4.1.2 Baseline Design

4.1.2.1 Instrumental sensitivity We expect laboratory measurements of the filter profiles. We further baseline the development of a procedure for measuring the filter response at 1 nm resolution using the approach described in [20].

We baseline the following procedure for creating flat fields:

1. Record bias/dark frames;
2. Use “monochromatic” (1 nm) flat field screen flats with no filter in the beam to measure the per-pixel sensitivity;
3. Use a collimated beam projector (CBP) to measure the quantum efficiency (QE) at a set of points in the focal plane, dithering those points to tie them together;

⁴Resolving contradictions between these documents is out of scope here.

4. Combine the screen and CBP data to determine the broad band (10–100 nm) QE of all pixels;
5. Fold in the filter response to determine the 1 nm resolution effective QE of all pixels.

This WBS is responsible for the development of the data analysis algorithms and software required and the ultimate delivery of the flat fields. Development and commissioning of the CBP itself, together with any other infrastructure required to perform the above procedure, lies outwith Data Management (see 04C.08 *Calibration System*).

4.1.2.2 Atmospheric transmissivity Measurements from the auxiliary instrumentation—to include the 1.2 m “Calypso” telescope, a bore-sight mounted radiometer and satellite-based measurement of atmospheric parameters such as pressure and ozone—will be used to determine the atmospheric absorption along the line of sight to standard stars. The atmospheric transmission will be decomposed into a set of basis functions and interpolated in space in time to any position in the LSST focal plane.

This WBS will develop a pipeline for accurate spectrophotometric measurement of stars with the auxiliary telescope. We expect to repurpose and build upon publicly available code e.g. from the PFS⁵ project for this purpose.

This WBS will construct the atmospheric model, which may be based either on MODTRAN (as per LSE-180) or a PCA-like decomposition of the data (suggested by [20]).

This WBS will define and develop the routine for fitting the atmospheric model to each exposure from the calibration telescope and providing estimates of the atmospheric transmission at any point in the focal plane upon request.

4.1.2.3 Detector effects An initial cross-talk correction matrix will be determined by laboratory measurements on the Camera Calibration Optical Bench (CCOB). However, to account for possible instabilities, this WBS will develop an on-telescope method. We baseline this as being based on measurement with the CBP, but we note the alternative approach based on cosmic rays adopted by HSC [13].

Multiple reflections between the layers of the CCD give rise to spatial variability with fine scale structure in images which may vary with time [20,

⁵Subaru’s Prime Focus Spectrograph; <http://sumire.ipmu.jp/pfs/>.

§2.5.1]. These can be characterized by white light flat-fields. Preliminary analysis indicates that these effects may be insignificant in LSST [23]; however, the baseline calls for a routine developed in this WBS to analyse the flat field data and generate fringe frames on demand. This requirement may be relaxed if further analysis (outside the scope of this WBS) demonstrates it to be unnecessary.

This WBS will develop algorithms to characterize and mitigate anomalies due to the nature of the camera’s CCDs.

Note:

There’s a complex inter-WBS situation here: the actual mitigation of CCD anomalies will generally be performed in SFM (WBS 02C.03.01), based on products provided by this WBS which, in turn, may rely on laboratory based research which is broadly outside the scope of DM. We baseline the work required to develop the corrective algorithms here. We consider moving it to WBS 02C.03.01 in future.

The effects we anticipate include:

- QE variation between pixels;
- Static non-uniform pixel sizes (e.g. “tree rings” [27]);
- Dynamic electric fields (e.g. “brighter-fatter” [2]);
- Time dependent effects in the camera (e.g. hot pixels, changing cross-talk coefficients);
- Charge transfer (in)efficiency (CTE).

Laboratory work required to understand these effects is outwith the scope of this WBS. In some cases, this work may establish that the impact of the effect may be neglected in LSST. The baseline plan addresses these issues through the following steps:

- Separate QE from pixel size variations⁶ and model both as a function of position (and possibly time);

⁶Refer to work by Rudman.

- Learn how to account for pixel size variation over the scale of objects (e.g. by redistributing charge);
- Develop a correction for the brighter-fatter effect and develop models for any features which cannot be removed;
- Handle edge/bloom using masking or charge redistribution;
- Track defects (hot pixels);
- Handle CTE, including when interpolating over bleed trails.

4.1.2.4 Ghost catalog The Calibration Products Pipeline must provide a catalog of optical ghosts and glints which is available for use in other parts of the system. Detailed characterization of ghosts in the LSST system will only be possible when the system is operational. Our baseline design therefore calls for this system to be prototyped using data from precursor instrumentation; we note that ghosts in e.g. HSC are well known and more significant than are expected in LSST.

Note:

It is not currently clear where the responsibility for characterizing ghosts and glints in the system lies. We assume it is outwith this WBS.

4.1.3 Constituent Use Cases and Diagrams

Produce Master Fringe Exposures; Produce Master Bias Exposure; Produce Master Dark Exposure; Calculate System Bandpasses; Calculate Telescope Bandpasses; Construct Defect Map; Produce Crosstalk Correction Matrix; Produce Optical Ghost Catalog; Produce Master Pupil Ghost Exposure; Determine CCOB-derived Illumination Correction; Determine Optical Model-derived Illumination Correction; Create Master Flat-Spectrum Flat; Determine Star Raster Photometry-derived Illumination Correction; Create Master Illumination Correction; Determine Self-calibration Correction-Derived Illumination Correction; Correct Monochromatic Flats; Reduce Spectrum Exposure; Prepare Nightly Flat Exposures;

4.1.4 Prototype Implementation

While parts of the Calibration Products Pipeline have been prototyped by the LSST Calibration Group (see the [LSE-180](#) for discussion), these have not been written using LSST Data Management software framework or coding standards. We therefore expect to transfer the know-how, and rewrite the implementation.

4.2 Photometric Calibration Pipeline (WBS 02C.03.07)

4.2.1 Key Requirements

The Photometric Calibration Pipeline is required to internally calibrate the relative photometric zero-points of every observation, enabling the Level 2 catalogs to reach the required SRD precision.

4.2.2 Baseline Design

The adopted baseline algorithm is a variant of “ubercal” [22, 25]. This baseline is described in detail in the Photometric Self Calibration Design and Prototype Document ([UCAL](#)).

4.2.3 Constituent Use Cases and Diagrams

Perform Global Photometric Calibration;

4.2.4 Prototype Implementation

Photometric Calibration Pipeline has been fully prototyped by the LSST Calibration Group to the required level of accuracy and performance (see the [UCAL](#) document for discussion).

As the prototype has not been written using LSST Data Management software framework or coding standards, we assume a non-negligible refactoring and coding effort will be needed to convert it to production code in LSST Construction.

4.3 Astrometric Calibration Pipeline (WBS 02C.03.08)

4.3.1 Key Requirements

The Astrometric Calibration Pipeline is required to calibrate the relative and absolute astrometry of the LSST survey, enabling the Level 2 catalogs to reach the required SRD precision.

4.3.2 Baseline Design

Algorithms developed for the Photometric Calibration Pipeline (WBS 02C.03.07) will be repurposed for astrometric calibration by changing the relevant functions to minimize. This pipeline will further be aided by WCS and local astrometric registration modules developed as a component of the Single Frame Processing pipeline (WBS 02C.03.01).

Gaia standard stars will be used to fix the global astrometric system. It is likely that the existence of Gaia catalogs may make a separate Astrometric Calibration Pipeline unnecessary.

4.3.3 Constituent Use Cases and Diagrams

Perform Global Astrometric Calibration;

4.3.4 Prototype Implementation

The Astrometric Calibration Pipeline has been partially prototyped by the LSST Calibration Group, but outside of LSST Data Management software framework. We expect to transfer the know-how, and rewrite the implementation.

5 Data Release Production

A Data Release Production is run every year (twice in the first year of operations) to produce a set of catalog and image data products derived from all observations from the beginning of the survey to the point the production began. This includes running a variant of the difference image analysis run in Alert Production, in addition to direct analysis of individual exposures and coadded images. The data products produced by a Data Release Production are summarized in table 1.

From a conceptual standpoint, data release production can be split into five groups of pipelines, executed in approximately the following order:

1. We characterize and calibrate each exposure, estimating point-spread functions, background models, and astrometric and photometric calibration solutions. This iterates between processing individual exposures independently and jointly fitting catalogs derived from multiple overlapping exposures. These steps are described more fully in section 5.1.
2. We alternately combine images and subtract them, using differences to find artifacts and time-variable sources while building coadds that produce a deeper view of the static sky. Coaddition and difference imaging is described in section 5.2.
3. We detect and deblend on coadds, while associating these detection with detections from difference imaging to define objects. We then merge catalogs in the overlap regions between patches and tracts to produce a single contiguous catalog over the full sky. This is described in section 5.3.
4. We measure objects on coadds and visit-level direct and difference images in object characterization, as described section 5.4.
5. After all image processing is complete, we run additional catalog-only pipelines to fill in additional object properties. Unlike previous stages, this postprocessing is not localized on the sky, as it may use statistics computed from the full data release to improve our characterization of individual objects. Postprocessing pipelines are described in section 5.5.

This conceptual ordering is an oversimplification of the actual processing flow, however; as shown in Figure 4, pipeline groups are actually interleaved.

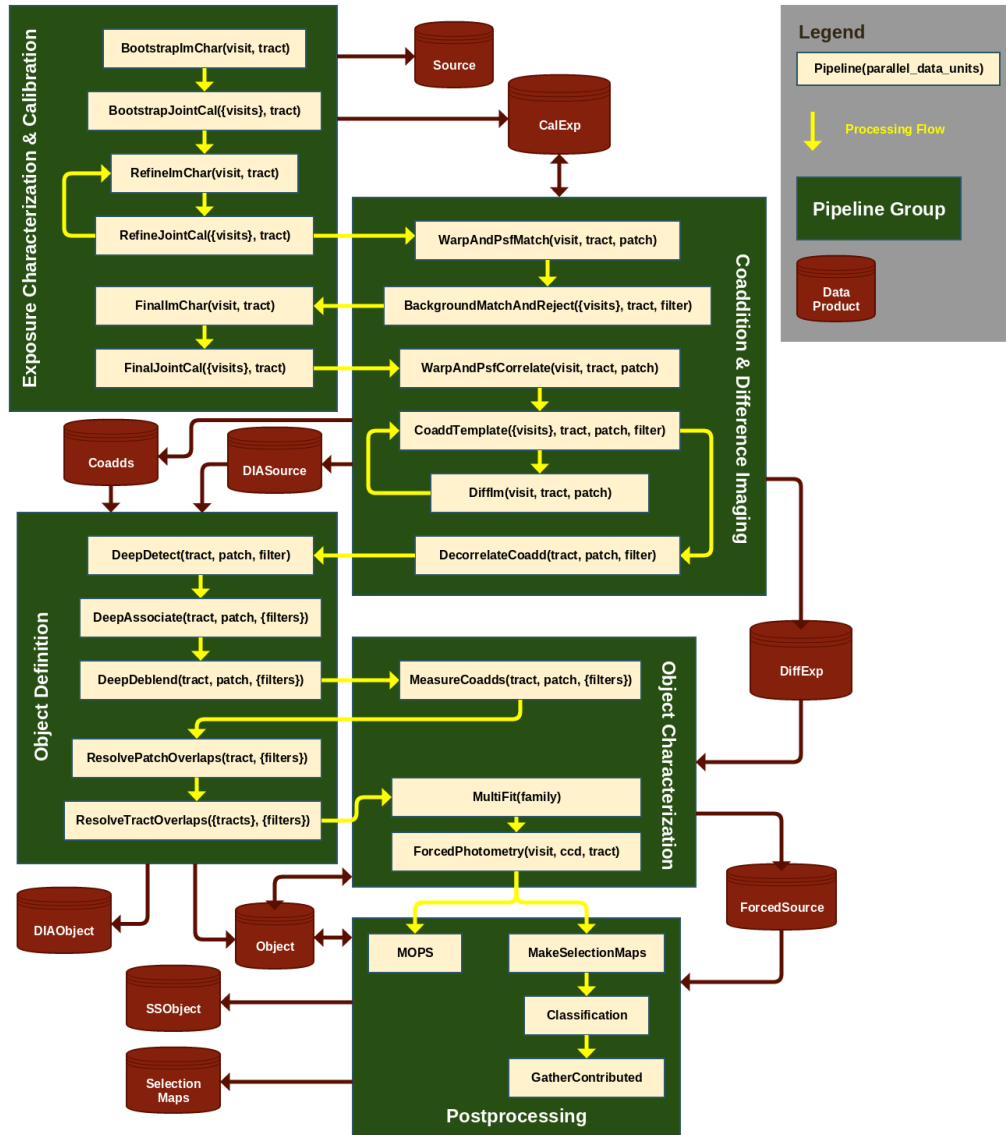


Figure 4: Summary of the Data Release Production processing flow. Processing is split into multiple pipelines, which are conceptually organized into the groups discussed in sections 5.1-5.5.

Name	Availability	Description
Source	Stored	Measurements from direct analysis of individual exposures.
DIASource	Stored	Measurements from difference image analysis of individual exposures.
Object	Stored	Measurements for a single astrophysical object, derived from all available information, including coadd measurements, simultaneous multi-epoch fitting, and forced photometry. Does not include solar system objects.
DIAObject	Stored	Aggregate quantities computed by associating spatially colocated DIASources.
ForcedSource	Stored	Flux measurements on each direct and difference image at the position of every Object.
SSObject	Stored	Solar system objects derived by associating DIASources and inferring their orbits.
CalExp	Regenerated	Calibrated exposure images for each CCD/visit (sum of two snaps).
DiffExp	Regenerated	Difference between CalExp and PSF-matched template coadd.
DeepCoadd	Stored	Coadd image with a reasonable combination of depth and resolution.
EpochRangeCoadd	Regenerated	Coadd image that cover only a limited range of epochs.
BestSeeingCoadd	Regenerated	Coadd image built from only the best-seeing images.
PSFMatchedCoadd	Regenerated	Coadd image with a constant, predetermined PSF.

Table 1: Table of public data products produced during a Data Release Production. A full description of these data products can be found in the Data Products Definition Document (LSE-163).

Each pipeline in this the diagram represents a particular piece of code executed in parallel on a specific unit of data, but pipelines may contain additional (and more complex) parallelization to further subdivide that data unit. The processing flow also includes the possibility of iteration between pipelines, indicated by cycles in the diagram. The number of iterations in each cycle will be determined (via tests on smaller productions) before the start of the production, allowing us to remove these cycles simply by duplicating some pipelines a fixed number of times. The final data release production processing can thus be described as a directed acyclic graph (DAG) to be executed by the orchestration middleware, with pipelines as edges and (intermediate) data products as vertices. Most of the graph will be generated by applications code before the production begins, using a format and/or API defined by the orchestration middleware. However, some parts of the graph must be generated on-the-fly; this will be discussed further in section 5.4.2.

5.1 Exposure Characterization and Calibration

ImChar/JointCal Diagram:

Extract ImChar/JointCal pipelines from “DRP Top-Level Overview” on confluence and expand detail to show data flow and ordering of “Task/Process” boxes.

5.1.1 BootstrapImChar

5.1.2 BootstrapJointCal

5.1.3 RefineImChar

5.1.4 RefineJointCal

5.1.5 FinalImChar

5.1.6 FinalJointCal

5.2 Coaddition and Difference Imaging

Coaddition, DiffIm Diagram:

Extract Coaddition and DiffIm pipelines from “DRP Top-Level Overview” on confluence and expand detail to show data flow and ordering of “Task/Process” boxes.

5.2.1 WarpAndPsfMatch**5.2.2 BackgroundMatchAndReject****5.2.3 WarpAndPsfCorrelate****5.2.4 CoaddTemplate****5.2.5 DiffIm****5.2.6 DecorrelateCoadds****5.3 Object Definition****Detection/Association/Deblending Diagram:**

Extract process_coadds pipeline from “DRP Top-Level Overview” on confluence and expand detail to show data flow and ordering of “Task/Process” boxes.

5.3.1 DeepDetect**5.3.2 DeepAssociate****5.3.3 DeepDeblend****5.3.4 ResolvePatchOverlaps****5.3.5 ResolveTractOverlaps****5.4 Object Characterization****Object Characterization Diagram:**

Extract multifit/forced_photometry pipelines from “DRP Top-Level Overview” on confluence and expand detail to show data flow and ordering of “Task/Process” boxes.

5.4.1 MeasureCoadds**5.4.2 MultiFit****5.4.3 ForcedPhotometry****5.5 Postprocessing****Postprocessing Diagram:**

Extract Afterburner pipelines from “DRP Top-Level Overview” on confluence and expand detail to show data flow and ordering of “Task/Process” boxes.

5.5.1 MOPS**5.5.2 MakeSelectionMaps****5.5.3 Classification****5.5.4 GatherContributed**

6 Services for Data Quality Analysis (SDQA)

6.1 Key Requirements

SDQA is a set of loosely coupled services intended to service LSST’s quality assessment needs through all phases of Construction, Commissioning and Operations. Consumers of these services may include developers, facility staff, DAC (eg. L3) users, and the general LSST science user community. Use of these services is intended for routine characterisation, fault detection and fault diagnosis.

- SDQA shall provide services for science data quality analysis of Level 1, 2, and Calibration Processing pipelines.
- SDQA shall provide services to support software development in Construction, Commissioning and Operations.
- SDQA shall provide for the visualization, analysis and monitoring capabilities needed for common science quality data analysis usecases. Its inputs may be gathered from SDQA itself, the production pipelines, engineering data sources and non-LSST data sources.
- SDQA shall have the flexibility to support execution of ad-hoc (user-driven) tests and analyses of ad-hoc data within a standard framework.
- SDQA shall support usecases involving interactive “drill-down” of QA data exposed through its visualisation interfaces.
- SDQA shall allow for notifications to be issued when monitoring quantities that exceed their permissible thresholds and/or have degraded over historical values.
- SDQA shall be able to collect and harvest the outputs and logs of execution of the production pipelines, and extract and expose metrics from these logs.
- SDQA shall make provision to store outputs that are not stored through other LSST data access services.
- SDQA should be deployable as high-reliability scalable services for production as well as allow for core data assessment functionality to be executed on a developer’s local machine.

- SDQA shall be architected in a manner that would enable it to be deployable on standard cloud architectures outside of the LSST facilities.

6.2 Key Tasks for Each Level of QA

SDQA system will provide a framework that is capable of monitoring QA information at four different stages of capability and maturity:

- QA Level 0 - Testing and Validation of the DM sub-system in pre-commissioning
- QA Level 1 - Real-time data quality and system assessment during commissioning + operations (also, forensics)
- QA Level 2 - Quality assessment of Data Releases (also, forensics)
- QA Level 3 - Ability for the community to evaluate the data quality of their own analyses. These should be available as well-documented and reproducible versions of core QA Level 0–2 services.

6.2.1 QA0

Test the DM software during pre-commissioning as well as test software improvements during commissioning and operations, quantifying the software performance against known and/or expected outputs.

Validating the software and its performance on standardized data.

(“Make me a three-color diagram, compute the width of point sources in the blue part of the locus”)

(“I have 20 visits all over the sky, I want to match up the results”)

The main components:

1. CI system that compiles code
2. Test execution harness – that runs test on a regular cadence eg nightly/weekly/monthly
3. A suite of validation metrics codes – some has to come from Science Pipelines, but KPMs are delivered by SQuaRE
4. Capability to instrument the production pipelines for computational performance metrics

5. Library of “instrumentations”
6. Interface to data products and QA metrics (including visualization)
 - (a) Tabular query result interface
 - (b) Visualizer for images
 - (c) Visualiser for scalar data (eg. Plotter)
 - (d) SuperTask execution on selected data
7. Curated datasets to use in tests
8. Capability for interactive analysis of QA outputs (drilldown into existing tests, ad hoc tests, ad hoc afterburners) – some has to come from Science Pipelines or SUIT but SQuaRE provides examples [move to Shared Software Components section]
 - (a) Tools that perform computations
 - (b) Tools that perform visualization (using Butler if astronomical, maybe direct database if not)
9. Connection from analysis toolkit to validation metrics (attach common interactive plots to validation metrics)
10. QA database including ingestion
11. Notification system for threshold crossings

Prototypes for all of these exist except “Toolkit for analysis of QA outputs” and “Connection from analysis toolkit to validation metrics”

“Toolkit for analysis of QA outputs” will take more resources than the others listed above, but some may be already scheduled in other teams

6.2.2 QA1

Data quality in real time during commissioning and operations. Analyzes the data stream in near-real time, information about observing conditions (sky brightness, transparency, seeing, magnitude limit) as well as characterize subtle deterioration in system performance.

Validating the operational system.

Main components reused from Level QA0:

1. Library of validation metrics codes
2. Instrumentation capability for computational performance metrics
3. Library of “instrumentations”
4. Interface to results (including visualization)
5. Curated datasets to use in tests
6. Capability for interactive analysis of failures (drilldown into existing tests, ad hoc tests, ad hoc afterburners) – some has to come from Science Pipelines or SUIIT but SQuaRE provides examples
7. Connection from analysis toolkit to validation metrics
8. QA data access service (including ingesting it as well as querying it)

Main components reused from Level QA0: All.

Additional components required for Level QA1 services:

1. Harness for analyzing alert contents (and perhaps format)
2. Faster metrics codes to meet overall 60 second performance requirement for alert publication (but not necessarily for all QA processing, which must meet only throughput requirements)
3. Additional metrics/instrumentation codes (that must not disturb production system, including its performance, when dynamically inserted)
4. Output interface to “comfort” display (aggregation, trending, etc.)
5. Output interface to automated systems (drop alerts, reschedule field, etc.)
6. Correlator between telemetry streams and metrics
7. Input interface from sources of data not already present in Prompt Processing system
8. Fake source injection and analysis
9. Metrics codes specific for calibration/engineering/special- purpose images

6.2.3 QA2

Assess the quality of data releases (including the co-added image data products) performing quality assessment for astrometric and photometric calibration and derived products, looking for problems with the image processing pipelines and systematic problems with the instrument. Validating the Data Release products. All components from QA0

New main components:

1. DRP-specific dataset
2. Release data product editing tools (including provenance tracking)
3. Output interface to workflow system based on QA results and provenance
4. Provenance analysis tools
5. Output interface to Science Pipelines, including from QA database
6. Comparison tools for overlap areas due to satellite processing
7. Metrics/products for science users to understand quality of science data products (depth mask/selection function, etc.)
8. Characterization report for Data Release

6.2.4 QA3

Data quality based on science analysis performed by the LSST Science Collaborations and the community. Level 0-2 visualization and data exploration tools will be made available to the community. Make all results from the above available. Make all of the above components available to some part of the community (could be just affiliated data centers or could be individual scientists) as a supported product. Ingest external science analysis data as Level 3 data products; ingest useful external science analysis tools.

6.2.5 Prototype Implementation of PipeQA

The pipeQA prototype is a useful reference for exploring ideas and we mention it here to capture this prototype work.

A prototype implementation of the SDQA was implemented in LSST Final Design Phase. The existing prototype was tested with image simulation

inputs, as well as real data (SDSS Stripe 82).

The prototype used a set of statically and dynamically generated pages (written in php) to display the results of data production runs. While proving invaluable for data analysis, the prototype design was found it to be difficult to extend with new analyst-developed tests.

The prototype code is available in the https://github.com/lsst/testing_displayQA git repository.

7 Science User Interface and Toolkit

7.1 Science Pipeline Toolkit (WBS 02C.01.02.03)

7.1.1 Key Requirements

The Science Pipeline Toolkit shall provide the software components, services, and documentation required to construct Level 3 science pipelines out of components built for Level 1 and 2 pipelines. These pipelines shall be executable on LSST computing resources or elsewhere.

7.1.2 Baseline Design

The baseline design assumes that Level 3 pipelines will use the same **Tasks** infrastructure (see the Data Management Middleware Design document; [DMMD](#)) as Level 1 and 2 pipelines⁷. Therefore, Level 3 pipelines will largely be automatically constructible as a byproduct of the overall design.

The additional features unique to Level 3 involve the services to upload/download data to/from the LSST Data Access Center. The baseline for these is to build them on community standards (VOspace).

7.1.3 Constituent Use Cases and Diagrams

Configure Pipeline Execution; Execute Pipeline; Incorporate User Code into Pipeline; Monitor Pipeline Execution; Science Pipeline Toolkit; Select Data to be Processed; Select Data to be Stored;

7.1.4 Prototype Implementation

While no explicit prototype implementation exists at this time, the majority of LSST pipeline prototypes have successfully been designed in modular and portable fashion. This has allowed a diverse set of users to customize and run the pipelines on platforms ranging from OS X laptops, to 10,000+ core clusters (e.g., BlueWaters), and to implement plugin algorithms (e.g., Kron photometry).

⁷Another way of looking at this is that, functionally, there will be no fundamental difference between Level 2 and 3 pipelines, except for the level of privileges and access to software or hardware resources.

8 Algorithmic Components

8.1 Instrument Signature Removal

AUTHOR: Merlin

- Mask defects and saturation
- Assembly
- Overscan
- Linearity
- Crosstalk
- Full frame corrections: Dark, Flats (includes fringing)
- Pixel level corrections: Brighter fatter, static pixel size effects
- Interpolation of defects and saturation
- CR rejection
- Generate snap difference
- Snap combination

8.1.1 AP: just skip some steps?

AUTHOR: Simon

- Indicate steps to be done by camera
- call out other steps that are omitted/modified relative to the DRP version

8.1.2 DRP: do all the steps

AUTHOR: Merlin

8.2 Artifact Detection

8.2.1 Single-Exposure Morphology

AUTHOR: Simon

- Find CRs via morphology.
- Find some optical ghosts (etc?) from bright star catalog and optics predictions.
- Needs to work without PSF (maybe using placeholder PSF), but also make use of PSF if available.

8.2.2 Single-Exposure Aggregation

AUTHOR: Simon

- Find satellites via Hough transform.

8.2.3 Snap Subtraction

AUTHOR: Simon

- All of the above, but improve by looking at both snaps.

8.2.4 Warped Image Comparison

AUTHOR: Jim

- Find more optical artifacts by looking at differences between warped images (this is run during background matching).
- Find transient astronomical sources we don't want to include in coadds.

8.3 Artifact Masking/Interpolation

AUTHOR: Jim

- Set mask planes for all artifacts.
- Eliminate small artifacts by interpolating them.
- Uses PSF model as interpolant.

8.4 Source Detection

AUTHOR: Jim

- Detect above-threshold regions and peaks in direct or difference images.
- Needs to work on preconvolved and unconvolved images.
- May need multi-pass variants: detect bright objects first, then faint; detect with approximate PSF, then improved.

8.5 Deblending

AUTHOR: Jim

For templates, try:

- symmetry ansatz with additional regularization
- simultaneous fit of galaxy models
- spline-based models with regularization?
- (multi-coadd only) optimize color uniformity

Will be especially challenging in crowded fields, but it needs to work in that regime as well.

8.5.1 Single Visit Deblending

- Generate HeavyFootprint deblends using only a single image.

8.5.2 Multi-Coadd Deblending

- Generate consistent HeavyFootprint deblends from coadds over multiple bands and possibly epoch ranges.

8.6 Measurement

AUTHOR: Jim

		Variants				
		Single Visit	Multi-Coadd	Difference Image	Multi-Epoch	Forced
Algorithms	Centroids					
	Second-Moment Shapes					
	Aperture Photometry					
	Static Point Source Models					
	Petrosian Photometry					
	Kron Photometry					
	Galaxy Models					
	Moving Point Source Models					
	Trailed Point Source Models					
	Dipole Fitting					
	Spuriousness					
Deblending	Replace Neighbors					
	Simultaneous Fitting					

Variant-Algorithm or Variant-Deblending combination is implemented and will be used

These photometry algorithms are also run in single-visit mode only to calculate their aperture corrections.

Both deblending approaches are implemented and compared; either or both may be used, depending on test results.

Deblending for these measurement variants will be implemented only if needed after testing with no deblending

Figure 5: Matrix showing combinations of measurement variants, algorithms, and deblending approaches that will be implemented.

8.6.1 Variants

Measurement is run in several contexts, but always consists of running an ordered list of algorithm plugins on either individual objects or families thereof. Each context corresponds to different variant of the measurement driver code, and has a different set of plugin algorithms and approaches to measuring blended objects.

8.6.1.1 Single Visit Measurement: Measure a direct single-visit CCD image, assuming deblend information already exists and can be used to replace neighbors with noise (see 8.6.3.2).

Single Visit Measurement is run in both AP's Single Frame Processing pipeline) and DRP's BootstrapImChar, RefineImChar, and FinalImChar.

The driver for Single Visit Measurement is passed an input/output SourceCatalog and an Exposure to measure. Plugins take an input/output SourceRecord and an Exposure containing only the object to be measured.

8.6.1.2 Multi-Coadd Measurement: Simultaneously measure a suite of coadds representing different bandpasses, epoch ranges, and flavors. This is run only in DRP's MeasureCoadds pipeline.

The driver for Multi-Coadd Measurement is passed an input/output ObjectCatalog and a dict of Exposures to be measured. Plugins take an input/output ObjectRecord and a dict of Exposures, each containing only the object to be measured. Some plugins will also support simultaneous measurement of multiple objects, which requires they be provided the subset of the ObjectCatalog to be measured and a dict of Exposures containing just those objects.

8.6.1.3 Difference Image Measurement: Measure a difference image, potentially using the associated direct image as well. Difference image measurement is run in AP's Alert Detection pipeline and DRP's DiffIm pipeline.

The signatures of difference image measurement's drivers and algorithms are at least somewhat TBD; they will take at least a difference image Exposures and a SourceCatalog/SourceRecord, but some plugins such as dipole measurement may require access to a direct image as well. Because difference imaging dramatically reduces blending, difference image measurement

may require any approach to blended measurement (though any use of the associated direct image would require deblending).

8.6.1.4 Multi-Epoch Measurement: Measure multiple direct images simultaneously by fitting the same WCS-transformed, PSF-convolved model to them. Blended objects in Multi-Epoch Measurement will be handled by *at least* fitting them simultaneously (8.6.3.3), which may in turn require hybrid galaxy/star models (8.6.3.4). These models may then be used as templates for deblending and replace-with-noise (8.6.3.2) measurement if this improves the results.

Because the memory and I/O requirements for multi-epoch measurement of a single object or blend family are substantial, we will not provide a driver that accepts an ObjectCatalog and measures all objects within it; instead, the pipeline will submit individual family-level jobs directly to the orchestration layer. The multi-epoch measurement driver will thus just operate on one blend family at a time, and manage blending while executing its plugin algorithms.

Multi-epoch measurement for DRP only includes two plugin algorithms, so it is tempting to simply hard-code these into the driver itself, but this driver will also need to support new plugins in Level 3.

Multi-epoch measurement will also be responsible for actually performing forced photometry on direct images, which it can do by holding non-amplitude parameters for moving point-source models fixed and adding a new amplitude parameter for each observation.

8.6.1.5 Forced Measurement: Measure photometry on an image using positions and shapes from an existing catalog.

In the baseline plan, we assume that forced measurement will only be run on difference images; while forced photometry on direct images will also be performed in DRP, this will be done by multi-epoch measurement.

Because difference imaging reducing blending substantially, forced measurement may not require any special handling of blends. If it does, simultaneous fitting (with point-source models) should be sufficient.

The driver for Forced Measurement is passed an input/output SourceCatalog, an additional input ReferenceCatalog, and an Exposure to measure. Plugins take an input/output SourceRecord, an input ReferenceRecord and an Exposure. If simultaneous fitting is needed to measure blends, plugins will instead receive subsets of the catalogs passed to the driver instead of

individual records.

Forced measurement is used by the DRP ForcedPhotometry pipeline and numerous pipelines in AP.

[**TODO:**
Add references to specific AP pipelines that will use forced measurement.]

8.6.2 Algorithms

8.6.2.1 Centroids

- should be equivalent to PSF model fit for stars
- use larger weight function (TBD) for extended objects

8.6.2.2 Second-Moment Shapes

- probably adaptive elliptical Gaussian weights, with fall back to unweighted, PSF-weighted, or some fixed Gaussian
- add regularization for unresolved objects - avoid crazy ellipticities for objects much smaller than PSF

8.6.2.3 Aperture Photometry

- Aperture fluxes are computed by summing the total flux within an elliptical region defined on the image.
- Aperture fluxes are computed at a series of logarithmically spaced aperture sizes. Per the [DPDD](#), the total number of apertures will vary depending on the size of the source.
- When computing fluxes for small apertures—for configurable values of “small”—we use sinc interpolation [5]. For large apertures, we use a naive summation of pixel values.
- Do we need to change ellipticities as a function of radius?

8.6.2.4 Static Point Source Models

- Fit PSF model for flux only (hold center fixed at centroid or reference value)
- Doesn't use per-pixel variances for flux measurement, but might also provide measurement with per-pixel variances (for diagnostics?)

8.6.2.5 Kron Photometry

- Compute Kron radius (hard to make this robust)
- Compute flux in elliptical aperture at Kron radius.

8.6.2.6 Petrosian Photometry

- Compute Petrosian radius. Harder than it seems due to need for improvements to splines? (ask RHL)
- Compute flux in elliptical aperture at Petrosian radius.

8.6.2.7 Galaxy Models

- Some sort of bulge+disk model. Lots of need for experimentation.
- Will Monte Carlo sample in MultiFit (and maybe on coadds, too, if that helps).
- May also fit to PSF-matched coadds for consistent colors.
- Will need to support simultaneous fitting (and sampling).
- Hybrid model candidate

8.6.2.8 Moving Point Source Models

- Fit point source with flux, centroid, parallax, and proper motion parameters.
- May need to support simultaneous fitting.
- Might want to sample this too, at least if we fit it simultaneously with sampled galaxy models.
- Hybrid model candidate

8.6.2.9 Trailed Point Source Models

- Fit PSF convolved with line segment to individual images

8.6.2.10 Dipole Models

- Fit PSF dipole for separation and flux to a combination of difference image and direct image.
- Deblending on direct image very problematic.

8.6.2.11 Spuriousness

- Some per-source measure of likelihood the detection is junk (in a difference image).
- May use machine learning on other measurements or pixels.
- May be augmented by spuriouness measures that aren't purely per-source.

8.6.3 Blended Measurement

- Integrate text from blended-measurement doc here.

8.6.3.1 Deblend Template Projection

8.6.3.2 Neighbor Noise Replacement

8.6.3.3 Simultaneous Fitting

8.6.3.4 Hybrid Models

8.7 Background Estimation

AUTHOR: Simon

- Fit or interpolate large-scale variations while masking out detections.
- Needs to work in crowded fields.

- Needs to work on both difference images and direct images.
- Need to be able to compose backgrounds measured in different coordinate systems on different scales.
- Needs to work on single CCDs for AP even if we use full FoV in DRP.

8.8 Build Background Reference

AUTHOR: Simon

- Given multiple overlapping visit images (already warped to a common coordinate system), synthesize a continuous single-epoch image that can be used as a reference for background matching.

8.9 PSF Estimation

8.9.1 Single CCD PSF Estimation

AUTHOR: Simon

- Fit simple empirical PSF model to stars from a single exposure.
- No chromaticity.
- May use external star catalog, but doesn't rely on one.
- Used in Alert Production and BootstrapImChar in DRP.

8.9.2 Full Visit PSF Estimation

AUTHOR: Jim

- Decompose PSF into optical + atmosphere.
- Constrain model with stars, telemetry, and wavefront data.
- Wavelength-dependent.
- Used in RefineImChar in DRP.
- Must include some approach to dealing with wings of bright stars.

8.10 Model Spatial Variation of PSF

8.10.1 Within a CCD

- Estimate PSF at discrete locations using a set of basis functions
- Fit interpolation functions to fit coefficients to enable interpolation

8.10.2 Over a focal plane – Do we need this?

8.11 Aperture Correction

AUTHOR: Jim

- Measure curves of growth from bright stars.
- Correct various flux measurements to infinite.
- Propagate uncertainty in aperture correction to corrected fluxes; covariance is tricky.

8.12 Astrometric Fitting

AUTHOR: Simon

8.12.1 Single CCD

Used by AP, probably (RHL worries we might need full-visit)

- If this uses DRP's internal reference catalog, this does all we need. THIS IS A NEW DEPENDENCY BETWEEN DRP AND AP.

8.12.2 Single Visit

- Fit multi-component WCS to all CCDs in a single visit simultaneously after matching to reference catalog.

8.12.3 Joint Multi-Visit

- Fit multi-component WCS to all CCDs from multiple visits simultaneously after matching to reference catalog.

8.13 Photometric Fitting

AUTHOR: Simon (and Merlin?)

8.13.1 Single CCD (for AP)

- Match to photometric calibration reference catalog
- Calculate single zeropoint using available color terms

8.13.2 Single Visit

- Fit zeropoint (and some small spatial variation?) to all CCDs simultaneously after matching to reference catalog.
- Need for chromatic dependence unclear; probably driven by AP.

8.13.3 Joint Multi-Visit

- Derive SEDs for calibration stars from colors and reference catalog classifications.
- Utilize additional information from wavelength dependent photometric calibration built by calibration products production.
- Fit zeropoint and possibly perturbations to all CCDs on multiple visits simultaneously after matching to reference catalog.

8.14 Retrieve Diffim Template for a Visit

AUTHOR: Simon

- Determine appropriate template to use
- Generate template for observation (may include DCR correction)

8.15 PSF Matching

AUTHOR: Simon

8.15.1 Image Subtraction

- Match template image to science image, as in Alert Production and DRP Difference Image processing.
- Includes identifying sources to use to determine matching kernel, fitting the kernel, and convolving by it.

8.15.2 PSF Homogenization for Coaddition

- Match science image to predetermined analytic PSF, as in PSF-matched coaddition.

8.16 Image Warping

AUTHOR: Jim

8.16.1 Oversampled Images

Oversampled images are warped to a new WCS and resampled using a two dimensional Lanczos kernel of configurable order. The baselined default order is 3.

The one dimensional Lanczos kernel of order a is defined as

$$L(x) = \begin{cases} \text{sinc}(x) \text{sinc}(x/a) & \text{if } -a < x < a \\ 0 & \text{otherwise.} \end{cases}$$

The two dimensional Lanczos kernel is $L(x, y) = L(x) \cdot L(y)$.

For each integer pixel position in the remapped image, the associated pixel position in the source image is determined using the source and destination WCS. The warping kernel is then applied to the source image to compute the remapped pixel value. A flux conservation factor is applied based on the relative sizes of the pixel in the source and destination WCS.

For performance reasons, it is desirable to reduce the total number of WCS calculations. It is therefore acceptable to perform the mapping between source and destination images over a regular grid and linearly interpolate between grid points, rather than mapping every pixel independently.

Note:

The above describes the current warping implementation in afw. We should identify deficiencies with the current implementation to establish resource requirements.

8.16.2 Undersampled Images

- Can use PSF model as interpolant if we also want to convolve with PSF (as in likelihood coadds). Otherwise impossible?

8.16.3 Irregularly-Sampled Images

- Approximate procedure for fixing small-scale distortions in pixel grid.

8.17 Image Coaddition

AUTHOR: Jim

- Can do outlier rejection (but usually doesn't).
- Needs to propagate full uncertainty somehow.
- May need to propagate larger-scale per-exposure masks to get right PSF model or other coadded quantities.
- Should be capable of combining coadds from different bands and/or epoch ranges as well as combining individual exposures.
- Also needs to support combining snaps

8.18 DCR-Corrected Template Generation

AUTHOR: Simon

- Somewhat like coaddition, but may need to add dimensions for wavelength or airmass, and may involve solving an inverse problem instead of just compute means.

8.19 Image Decorrelation

8.19.1 Difference Image Decorrelation

AUTHOR: Simon

- Fourier-space (?) deconvolution of preconvolved difference images before measurement - ZOGY as reinterpreted by Lupton (could apply correction in real space, too)
- Need to test with small-scale research before committing to this approach.

8.19.2 Coadd Decorrelation

AUTHOR: Jim

- Fourier-space/iterative deconvolution of likelihood coadds, as in DMTN-15.
- Need to test with small-scale research before committing to this approach.

8.20 Star/Galaxy Classification

AUTHOR: Jim

8.20.1 Single Visit S/G, Pre-PSF

- Select stars to be used in PSF estimation (mostly from moments).

8.20.2 Single Visit S/G, Post-PSF

- Extendedness or trace radius difference that classifies sources based on single frame measurements that can utilize the PSF model. Used to select single-frame calibration stars, and probably aperture correction stars.

8.20.3 Multi-Source S/G

- Aggregate of single-visit S/G post-PSF numbers in jointcal.

8.20.4 Object Classification

- Best classification derived from multfit and possibly variability.

8.21 Variability Characterization

Following the [DPDD](#), lightcurve variability is characterized by providing a series of numeric summary ‘features’ derived from the lightcurve. The DPDD baselines an approach based on Richards et al. [24], with the caveat that ongoing work in time domain astronomy may change the definition, but not the number or type, of features being provided.

Richards et al. define two classes of features: those designed to characterize variability which is periodic, and those for which the period, if any, is not important. We address both below.

All of these metrics are calculated for both Objects ([DPDD](#) table 4, `lcPeriodic` and `lcNonPeriodic`) and DIAObjects ([DPDD](#) table 2, `lcPeriodic` and `lcNonPeriodic`). They are calculated and recorded separately in each band. Calculations for Objects are performed based on forced point source model fits ([DPDD](#) table 5, `psFlux`). Calculations for DIAObjects are performed based on point source model fits to DIASources ([DPDD](#) table 1, `psFlux`). In each case, calculation requires the fluxes and errors for all of the sources in the lightcurve to be available in memory simultaneously.

8.21.1 Characterization of periodic variability

- Characterize lightcurve as the sum of a linear term plus sinusoids at three fundamental frequencies plus four harmonics:

$$y(t) = ct + \sum_{i=1}^3 \sum_{j=1}^4 y_i(t|jf_i) \quad (1)$$

$$y_i(t|jf_i) = a_{i,j} \sin(2\pi j f_i t) + b_{i,j} \cos(2\pi j f_i t) + b_{i,j,0} \quad (2)$$

where i sums over fundamentals and j over harmonics.

- Use iterative application of the generalized Lomb-Scargle periodogram, as described in [24], to establish the fundamental frequencies, f_1, f_2, f_3 :
 - Search a configurable (minimum, maximum, step) linear frequency grid with the periodogram, applying a $\log f/f_N$ penalty for fre-

quencies above $f_N = 0.5\langle 1/\Delta T \rangle$, identifying the frequency f_1 with highest power;

- Fit and subtract that frequency and its harmonics from the lightcurve;
- Repeat the periodogram search to identify f_2 and f_3 .

- We report a total of 32 floats:

- The linear coefficient, c (1 float)
- The values of f_1, f_2, f_3 . (3 floats)
- The amplitude, $A_{i,j} = \sqrt{a_{i,j}^2 + b_{i,j}^2}$, for each i, j pair. (12 floats)
- The phase, $\text{PH}_{i,j} = \arctan(b_{i,j}, a_{i,j}) - \frac{jf_i}{f_1} \arctan(b_{1,1}, a_{1,1})$, for each i, j pair, setting $\text{PH}_{1,1} = 0$. (12 floats)
- The significance of f_1 vs. the null hypothesis of white noise with no periodic signal. (1 float)
- The ratio of the significance of each of f_2 and f_3 to the significance of f_1 . (2 floats)
- The ratio of the variance of the lightcurve before subtraction of the f_1 component to its variance after subtraction. (1 float)

NB the [DPDD](#) baselines providing 32 floats, but, since $\text{PH}_{1,1}$ is 0 by construction, in practice only 31 need to be stored.

8.21.2 Characterization of aperiodic variability

In addition to the periodic variability described above, we follow [24] in providing a series of statistics computed from the lightcurve which do not assume periodicity. They define 20 floating point quantities in four groups which we describe here, again with the caveat that future revisions to the [DPDD](#) may require changes to this list.

Basic quantities:

- The maximum value of delta-magnitude over delta-time between successive points in the lightcurve.
- The difference between the maximum and minimum magnitudes.
- The median absolute deviation.

- The fraction of measurements falling within 1/10 amplitudes of the median.
- The “slope trend”: the fraction of increasing minus the fraction of decreasing delta-magnitude values between successive pairs of the last 30 points in the lightcurve.

Moment calculations:

- Skewness.
- Small sample kurtosis, i.e.

$$\text{Kurtosis} = \frac{n(n+1)}{(n-1)(n-2)(n-3)} \sum_{i=1}^n \left(\frac{x_i - \bar{x}}{s} \right)^4 - \frac{3(n-1)^2}{(n-2)(n-3)} \quad (3)$$

$$s = \sqrt{\frac{1}{n-1} \sum_{i=1}^n (x_i - \bar{x})^2} \quad (4)$$

- Standard deviation.
- The fraction of magnitudes which lie more than one standard deviation from the weighted mean.
- Welch-Stetson variability index J [26], defined as

$$J = \frac{\sum_k \text{sgn}(P_k) \sqrt{|P_k|}}{K},$$

where the sum runs over all K pairs of observations of the object, where sgn returns the sign of its argument, and where

$$P_k = \delta_i \delta_j \quad (5)$$

$$\delta_i = \sqrt{\frac{n}{n-1}} \frac{\nu_i - \bar{\nu}}{\sigma_\nu}, \quad (6)$$

where n is the number of observations of the object, and ν_i its flux in observation i . Following the procedure described in Stetson [26], the mean is not the simple weighted algebraic mean, but is rather reweighted to account for outliers.

- Welch-Stetson variability index K [26], defined as

$$K = \frac{1/n \sum_{i=1} N |\delta_i|}{\sqrt{1/n \sum_{i=1} N |\delta_i^2|}},$$

where N is the total number of observations of the object and δ_i is defined as above.

Percentiles. Taking, for example, $F_{5,95}$ to be the difference between the 95% and 5% flux values, we report:

- All of $F_{40,60}/F_{5,95}$, $F_{32.5,67.5}/F_{5,95}$, $F_{25,75}/F_{5,95}$, $F_{17.5,82.5}/F_{5,95}$, $F_{10,90}/F_{5,95}$
- The largest absolute departure from the median flux, divided by the median.
- The ratio of $F_{5,95}$ to the median.

QSO similarity metrics, as defined by Butler & Bloom [10]:

- χ_{QSO}^2/ν .
- $\chi_{\text{False}}^2/\nu$.

8.22 Proper Motion and Parallax from DIASources

AUTHOR: Simon

- Fit proper motion and parallax models to all positions of DIASources belonging to a DIAObject taking into account errors.

8.23 Association and Matching

8.23.1 Single CCD to Reference Catalog, Semi-Blind

AUTHOR: Simon

- Want to match in image coordinates, so also needs to transform reference catalog.
- Run prior to single-visit WCS fitting, with only telescope's best guess as a starting WCS.
- Single CCD form needed by AP.

8.23.2 Single Visit to Reference Catalog, Semi-Blind

AUTHOR: Simon

- Want to match in focal plane coordinates, so also needs to transform reference catalog.
- Run prior to single-visit WCS fitting, with only telescope's best guess as a starting WCS.

8.23.3 Multiple Visits to Reference Catalog

AUTHOR: Jim

- Match sources from multiple visits to a single reference catalog, assuming good WCSs.

8.23.4 DIAObject Generation

AUTHOR: Simon

- Match all DIASources to predicted Solar System object positions and existing DIAObjects and generate new DIAObjects. Definitely run in AP, maybe run in DRP.

8.23.5 Object Generation

AUTHOR: Jim

- Match coadd detections from different bands/SEDs/epoch-ranges, merging Footprints and associating peaks.
- Also merge in DIASources or (if already self-associated) DIAObjects.

8.23.6 Cross-Patch Merging

AUTHOR: Jim

- Resolve duplicates in patch overlap regions by flagging “primary” objects. Difficult due to blending.

8.23.7 Cross-Tract Merging

AUTHOR: Jim

- Resolve duplicates in tract overlap regions by flagging “primary” objects. Difficult due to blending.

8.24 Ephemeris Calculation

AUTHOR: Simon

- Calculate positions for all solar system objects in a region at a given time.

8.25 Make Tracklets

AUTHOR: Simon

- Make all tracklet pairs
- Merge multiple chained observation into single longer tracklets
- Purge any tracklets inconsistent with the merged tracklets

8.26 Attribution and precovery

AUTHOR: Simon

- Predict locations of known Solar System objects
- Match tracklet observation to predicted ephemerides taking into account velocity
- Update SSObjects
- Possibly iterate

8.27 Orbit Fitting

AUTHOR: Simon

- Merge unassociated tracklets into tracks.
- Fit orbits to all tracks.
- Purge unphysical tracks.
- Update SSObjects
- Possibly iterate

9 Software Primitives

9.1 Images

9.1.1 Exposure

9.2 Tables

9.2.1 Source

9.2.2 Reference

9.2.3 Object

9.3 Footprints

9.4 Convolution Kernels

Must support correlation as well.

9.5 Basic Statistics

9.6 Point-Spread Functions

9.7 Coordinate Transformations

10 Glossary

API Applications Programming Interface

CBP Collimated Beam Projector

CCOB Camera Calibration Optical Bench

CTE Charge Transfer Efficiency

DAC Data Access Center

DAQ Data Acquisition

DMS Data Management System

DR Data Release.

EPO Education and Public Outreach

Footprint The set of pixels that contains flux from an object. Footprints of multiple objects may have pixels in common.

FRS Functional Requirements Specification

MOPS Moving Object Pipeline System

OCS Observatory Control System

Production A coordinated set of pipelines

PFS Prime Focus Spectrograph. An instrument under development for the Subaru Telescope.

PSF Point Spread Function

QE Quantum Efficiency

RGB Red-Green-Blue image, suitable for color display.

SDS Science Array DAQ Subsystem. The system on the mountain which reads out the data from the camera, buffers it as necessary, and supplies it to data clients, including the DMS.

SDQA Science Data Quality Assessment.

SNR Signal-to-Noise Ratio

SQL Structured Query Language, the common language for querying relational databases.

TBD To Be Determined

Visit A pair of exposures of the same area of the sky taken in immediate succession. A Visit for LSST consists of a 15 second exposure, a 2 second readout time, and a second 15 second exposure.

VO Virtual Observatory

VOEvent A VO standard for disseminating information about transient events.

WCS World Coordinate System. A bidirectional mapping between pixel- and sky-coordinates.

References

- [1] M. Ankerst, M. M. Breunig, H.-P. Kriegel and J. Sander, **OPTICS: Ordering Points To Identify the Clustering Structure**, Proc ACM SIGMOD (1999).
- [2] P. Antilogus, P. Astier, P. Doherty, A. Guyonnet and N. Regnault **The brighter-fatter effect and pixel correlations in CCD sensors** Journal of Instrumentation, Volume 9, Issue 3, article id. C03048 (2014).
- [3] A. Becker et al, **Report on Late Winter 2013 Production: Image Differencing** <http://ls.st/x9f>.
- [4] A. Becker, **Report on Summer 2014 Production: Analysis of DCR**, https://github.com/lsst-dm/S14DCR/blob/master/report/S14report_V0-00.pdf.
- [5] **An algorithm for precise aperture photometry of critically sampled images**, MNRAS 431, 1275–1285, 2013
- [6] J. S. Bloom et al, **Automating discovery and classification of transients and variable stars in the synoptic survey era**, PASP 124, 1175–1196 (2012).
- [7] J. F. Bosch, **Modeling Techniques for Measuring Galaxy Properties in Multi-Epoch Surveys**, PhD Thesis, University of California, Davis (2011). <http://adsabs.harvard.edu/abs/2011PhDT.....226B>
- [8] J. Bosch, P. Gee, R. Owen, M. Juric and the LSST DM team, **LSST DM S13 Report: Shape measurement plans and prototypes**, <https://docushare.lsstcorp.org/docushare/dsweb/ImageStoreViewer/Document-15298>
- [9] J. Bosch, **Measurement of Blended Objects in LSST**.
- [10] **Optimal Time-Series Selection of Quasars**, ApJ 141, 93 (2011).
- [11] **Automated Supervised Classification of Variable Stars I. Methodology**, A&A 475, 1159–1183 (2007).

- [12] E. M. Huff et al, **Seeing in the dark – I. Multi-epoch alchemy**, <http://arxiv.org/abs/1111.6958>.
- [13] H. Furusawa et al, **Hyper Suprime-Cam Survey Pipeline Description**, http://hsca.ipmu.jp/pipeline_outputs.pdf.
- [14] M. J. Jee and J. A. Tyson, **Toward Precision LSST Weak-Lensing Measurement. I. Impacts of Atmospheric Turbulence and Optical Aberration**, PASP 123, 596(2011).
- [15] M. J. Jee, J. A. Tyson, M. D. Schneider, D. Wittman, S. Schmidt and S. Hilbert, **Cosmic shear results from the Deep Lens Survey. I. Joint constraints on Ω_M and σ_8 with a two-dimensional analysis**, ApJ 765 74 (2013).
- [16] J. Kubica et al, **Efficiently Tracking Moving Sources in the LSST**, Bulletin of the American Astronomical Society, 37, 1207 (2005).
- [17] D. Lang, D. Hogg, S. Jester and H.-W. Rix, **Measuring the undetectable: Proper motions and parallaxes of very faint sources**, AJ 137 4400–4111 (2009).
- [18] R. H. Lupton et al, **SDSS Image Processing II: The *Photo* Pipelines**. <http://www.astro.princeton.edu/~rhl/photo-lite.pdf>
- [19] R. Lupton and Ž. Ivezić, **Experience with SDSS: the Promise and Perils of Large Surveys**, Astrometry in the Age of the Next Generation of Large Telescopes, ASP Conferences Series, Vol 338 (2005). <http://adsabs.harvard.edu/abs/2005ASPC..338..151L>
- [20] R. Lupton, M. Jurić and C. Stubbs, **LSST’s Plans for Calibration Photometry**, July 2015.
- [21] L. Denneau, J. Kubica and R. Jedicke, **The Pan-STARRS Moving Object Pipeline**, Astronomical Data Analysis Software and Systems XVI ASP Conference Series, Vol. 376, proceedings of the conference held 15-18 October 2006 in Tucson, Arizona, USA. Edited by Richard A. Shaw, Frank Hill and David J. Bell., p.257.

- [22] N. Padmanabhan et al, **An Improved Photometric Calibration of the Sloan Digital Sky Survey Imaging Data**, ApJ 674 1217–1233 (2008).
- [23] A. Rasmussen, **Sensor Modeling for the LSST Camera Focal Plane: Current Status of SLAC Originated Code** July 2015. <https://docushare.lsstcorp.org/docushare/dsweb/Get/Document-8590>.
- [24] J. Richards et al, **On Machine-learned Classification of Variable Stars with Sparse and Noisy Time-series Data**, ApJ 733 10 (2011).
- [25] E. F. Schlafly et al, **Photometric Calibration of the First 1.5 Years of the Pan-STARRS1 Survey**, ApJ 756 158 (2012).
- [26] Stetson, P.B., **On the Automatic Determination of Light-Curve Parameters for Cepheid Variables**, PASP 108 851–876 (1996).
- [27] C. W. Stubbs, **Precision Astronomy with Imperfect Fully Depleted CCDs – An Introduction and a Suggested Lexicon**, Journal of Instrumentation, Volume 9, Issue 3, article id. C03032 (2014).
- [28] A. S. Szalay, A. J. Connolly and G. P. Szokoly, **Simultaneous Multicolor Detection of Faint Galaxies in the Hubble Deep Field**, AJ 117 68–74 (1999).